

elcometer®
inspection equipment



Elcometer 224
surface profile gauge

Elcometer 224

Separate Digital Surface Profile Gauge

The Elcometer 224 provides the very latest in surface profile measuring technology for measuring profile on either flat or curved surfaces.

STANDARDS:

ASTM D 4417-B, SANS 5772,
SSPC PA 17, US Navy NSI 009-32,
US Navy PPI 63101-000

Integral & separate probe options for flat and convex¹ surfaces

USB and Bluetooth® data output to ElcoMaster® software, see page 12-2

Dust and water resistant rugged design equivalent to IP64

Auto rotating display with tap awake feature



¹ Applicable Patents: GB2505193, US9261345

Elcometer 224

Separate Digital Surface Profile Gauge

User Friendly

- Large buttons ideal for gloved hands
- Easy to use menu structure in multiple languages
- High contrast colour LCD with auto rotate
- High and low reading limit indicators
- Factory calibrated for immediate use

Accurate

- Can be used in accordance with National and International Standards
- Temperature stable measurements
- Statistics are calculated and displayed in real time
- Live and batch readings graph format for instant analysis

Reliability

- Repeatable and reproducible measurements
- 2 year gauge warranty²
- Supplied with fully traceable Test Certificates
- Batch & individual readings are date and time stamped

Tough

- Sealed, heavy duty and impact resistant
- Dust and waterproof equivalent to IP64
- Suitable for use in harsh environments
- Scratch and solvent resistant display
- Durable gauge and probe construction

Efficient

- Fast reading rate of 50+ per minute
- Integral and separate probe versions to suit your application
- Alpha numeric batch identification
- Compatible with ElcoMaster® software and ElcoMaster® Mobile App
- Powersave Mode with tap awake

Powerful

- User replaceable tough tungsten carbide tip, can be used for up to 20,000 readings
- USB and Bluetooth® data output to iPhone¹ or Android™ devices
- Measures profiles up to 500µm (20mils)



Integral or separate probes measure profiles up to 500µm (20mils)



Ergonomic design for comfort during continuous use




2.4" colour screen provides enhanced reading visibility at all angles

¹ Compatible with iPod, iPhone and iPad.

² The Elcometer 224 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via www.elcometer.com.

Elcometer 224

Separate Digital Surface Profile Gauge

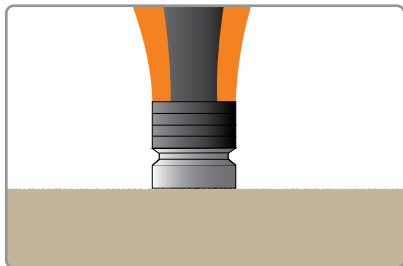


Flat Surface Profile Probes

Supplied with either standard cables or armoured metal reinforced heavy duty cables, Elcometer surface profile probes are supplied with a glass zero tile, calibration test foils (nominal values 125µm (5.0mils) & 508µm (20mils)) and an Elcometer test certificate.



Technical Specification

Range: 0-500µm (0-20mils)		Resolution: 1µm (0.1mil)		Accuracy: ±5% or ±5µm (±0.2mil)	
Probe Design	Part Number	Minimum Headroom	Minimum Sample Diameter	Certificate	
Flat Surface: Standard	T224C500US	125mm (4.92")	25mm (1.0")	●	
Flat Surface: Armoured	T224C500UARM	165mm (6.50")	25mm (1.0")	●	

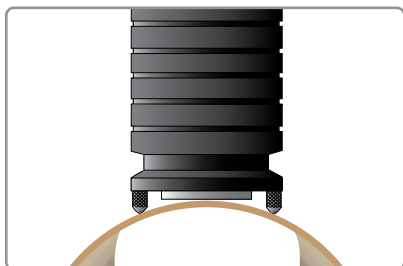

Convex Surface Profile Probes

Supplied with either standard cables or armoured metal reinforced heavy duty cables, Elcometer convex surface profile probes are supplied with a glass zero tile, calibration test foils (nominal values 125µm (5.0mils) & 508µm (20mils)) and an Elcometer test certificate.



Technical Specification

Range: 0-500µm (0-20mils)		Resolution: 1µm (0.1mil)		Accuracy: ±5% or ±5µm (±0.2mil)	
Probe Design	Part Number	Minimum Headroom	Minimum Pipe Diameter	Certificate	
Convex Surface: Standard*	T224C500UX	135mm (5.31")	75mm (3.0")	●	
Convex Surface: Armoured*	T224C500UXARM	175mm (6.89")	75mm (3.0")	●	

Accessories

Part Number		Description
Integral Gauge	Separate Gauge	
T22419793	T22419793	Probe Tip Protection Cap
T22420072	T22420072	Glass Zero Tile with Wallet
T22421882C	T22421882C	Certified Calibration Test Kit: 125µm & 500µm (5 & 20mils) Calibration Foils, Glass Zero Tile & Calibration Certificate
T99921325	T99921325	USB Cable
T99924797	T99924797	USB Bluetooth® Adaptor (V2.0+) - for PCs without Bluetooth®
T99922341	T99922341	Self Adhesive Screen Protectors (Pack of 10)
T22420053	T22420053	Replacement Tip (Pack of 2) with Fixing Tool
T22420095	T22420095	Replacement Tip (Pack of 5)
-	T45622371	Benchtop Inspection Stand

● Test Certificate supplied as standard.
Elcometer 224 probes are covered by a 1 year warranty

* Applicable Patents: GB2505193, US9261345

Elcometer 224

Integral Digital Surface Profile Gauge

Fast, accurate and user friendly, the **Elcometer 224** is available with or without memory and Bluetooth®.

Review batch data or last 20 readings in a graph format

Time & date stamped measurements

Measurement capability to $\pm 5\%$

Stores up to 150,000 readings in up to 2,500 alphanumeric batches

Fast reading rate of 50+ readings per minute¹

Accurate, immediate and repeatable results

User replaceable tough tungsten carbide tips



STANDARDS:

ASTM D 4417-B, SANS 5772,
SSPC PA 17, US Navy NSI 009-32,
US Navy PPI 63101-000

¹ Up to 25 readings per minute for the convex probe

Elcometer 224

Digital Surface Profile Gauge

Product Features	■ Standard	□ Optional
	Model B	Model T
Fast, accurate reading rate; <i>50+ readings per minute</i> ¹	■	■
Repeatable & reproducible measurements	■	■
Easy to use menu structure; <i>in 30+ languages</i>	■	■
Tough, impact, waterproof & dust resistant; <i>equivalent to IP64</i>	■	■
Bright colour screen; <i>with permanent back light</i>	■	■
Scratch & solvent resistant display; <i>2.4" (6cm) TFT</i>	■	■
Large positive feedback buttons	■	■
Flat & convex surfaces ²	■	■
USB power supply; <i>via PC</i>	■	■
Test certificate	■	■
2 year gauge warranty ³	■	■
Automatic rotating display; <i>0°, 90°, 180° & 270°</i>	■	■
Ambient light sensor; <i>with adjustable auto brightness</i>	■	■
Emergency Light Mode	■	■
Gauge software updates ⁴ ; <i>via ElcoMaster® software</i>	■	■
Data output	■	■
USB; <i>to computer</i>	■	■
Bluetooth®; <i>to computer, Android™ & iOS⁵ devices</i>		■
On screen statistics	■	■
Number of readings, n ; Mean (average), \bar{x} ; Standard deviation, σ ;	■	■
Highest reading, H_i ; Lowest reading, L_o ; Coefficient of variation, $CV\%$		
High & low limits; <i>definable audible & visual alarms</i>		■
Number above high limit;		■
Number below low limit;		■
ElcoMaster® software & USB cable		■
Date and time stamp <i>for each reading</i>		■
Replaceable screen protectors	■	■
Protective case	■	■
Plastic transit case	□	■
Measurement range	0-500µm (20 mils)	0-500µm (20 mils)
On screen calibration instructions; <i>in 30+ languages</i>	■	■
Number of batches		2,500
Gauge memory; <i>number of readings</i>	Last 5	150,000
Delete last reading	■ ⁶	■
Limits; <i>user definable audible & visual pass/fail warnings</i>		■
Gauge (g) or gauge & batch specific (gb) limits		gb
Batch types; <i>normal, counted average</i>		■
Review, clear & delete batches		■
Copy batches and calibration settings		■
Alpha-numeric batch names; <i>user definable on the gauge</i>		■
Fixed Batch Size Mode; <i>with batch linking</i>		■
Trend graph; <i>last 20 readings</i>		■
Review batch graph		■

¹ Up to 25 readings per minute for the convex probe ² Applicable Patents: GB2505193, US9261345 ³ The Elcometer 224 is supplied with a 1 year warranty against manufacturing defects. The warranty can be extended free of charge to 2 years within 60 days of purchase via www.elcometer.com. Elcometer 224 probes are covered by a 1 year warranty. ⁴ Internet connection required ⁵ Visit www.elcometer.com/sdk to find out how to integrate Elcometer's MFi certified products to your App.

⁶ Up to the last 5 readings can be deleted

Elcometer 224

Digital Surface Profile Gauge


Model Options

Part Number	Description	Certificate
Integral Gauge	Separate Gauge ¹	
E224C-BI	E224C-BS Elcometer 224 Model B Digital Surface Profile Gauge	•
E224C-TI	E224C-TS Elcometer 224 Model T Digital Surface Profile Gauge	•

Technical Specification

Display Information	2.4" (6cm) QVGA colour TFT display, 320 x 240 pixels		
Battery Type	2 x AA batteries, rechargeable batteries can also be used		
Battery Life	Approximately 24 hours of continuous use at 1 reading per second ²		
Minimum Headroom	Integral:	185mm (7.3")	
	Separate:	See page 3-6	
Gauge Dimensions (h x w x d)	Integral:	168 x 73 x 37mm (5.61 x 2.87 x 1.46")	
	Separate:	141 x 73 x 37mm (5.55 x 2.87 x 1.46")	
Gauge Weight (including batteries)	Integral:	218g (7.69oz)	
	Separate:	161g (5.68oz)	
Measurement Range	0-500µm (0-20mils)		
Probe Tip	Tungsten carbide tip 60° angle; Tip Radius: 50µm (2mil)		
Operating Temperature	-10 to 50°C (14 to 122°F)	Storage temperature	-10 to 60°C (14 to 140°F)
Accuracy & Resolution	Accuracy ³ : ±5% or ±5µm (±0.2mil); Resolution: 1µm (0.1mil)		
Packing List ⁴	Elcometer 224 gauge, glass zero tile ⁴ , 2 x calibration foils ⁴ , wrist harness, plastic transit case (T), protective case, screen protector, probe protection cap ⁴ , 2 x AA batteries, test certificate, operating instructions, USB cable (T) & ElcoMaster [®] software (T)		

Measuring Surface Profile

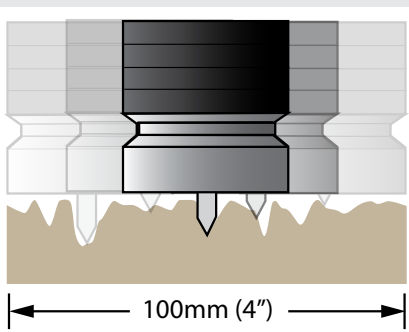

1. Ensure probe is 90° to substrate to ensure accurate readings and calibrate the gauge on a glass zero tile.
2. To take one spot measurement, take either 5 or 10 readings within a 100mm (4") diameter area.
3. The measurement displayed is either the average peak-to-valley height or the maximum reading of the 5 or 10 readings, depending on which measurement mode you have selected.
4. To establish the average surface profile of an area, record 5 spot measurements for each 1m x 1m (3ft x 3ft) area.

¹ Probes are supplied separately, see page 3-8 for details.

² Using default settings & lithium batteries, alkaline or rechargeable batteries may differ.

³ Whichever is the greater.

⁴ For separate gauges, the test foils, glass zero tile and probe protection cap are supplied with the separate probe.

• Test Certificate supplied as standard.



ENGLAND, UK

Elcometer Limited
+44 (0)161 371 6000
sales@elcometer.com
www.elcometer.com

FRANCE

Elcometer Sarl
+33 (0)2 38 86 33 44
fr_info@elcometer.com
www.elcometer.fr

GERMANY

Elcometer Instruments GmbH
AALEN: +49 (0) 7361 52806 0
LEER: +49 (0) 7361 528 06 60
de_info@elcometer.com
www.elcometer.de

THE NETHERLANDS

Elcometer B.V.
+31 (0)30 259 1818
nl_info@elcometer.com
www.elcometer.nl

JAPAN

Elcometer KK
+81 (0)3 6869 0770
jp_info@elcometer.com
www.elcometer.co.jp

REPUBLIC OF SINGAPORE

Elcometer (Asia) Pte Ltd
+65 6462 2822
asia@elcometer.com
www.elcometer.com

UNITED ARAB EMIRATES

Elcometer LLC
+971 4 295 0191
+971 4 280 3526
uae_sales@elcometer.com
www.elcometer.ae

UNITED STATES OF AMERICA

Elcometer Inc
WARREN, MI: +1 248 650 0500
HOUSTON, TX: +1 713 450 0631
Toll Free: 800 521 0635
inc@elcometer.com
www.elcometer.com



elcometer®
coatings inspection

Elcometer 224 Model T: Made for iPhone 6 Plus, iPhone 6, iPhone 5s, iPhone 5c, iPhone 5, iPhone 4s, iPhone 4, iPad Air 2, iPad mini 3, iPad Air, iPad mini 2, iPad (3rd and 4th generation), iPad mini, iPad 2, and iPod touch (4th and 5th generation). "Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

iPad, iPhone, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a trademark of Apple Inc., registered in the U.S. and other countries. Suitable for mobile devices running Android software version 2.1 and upwards. Elcometer is a registered trademark of Elcometer Limited. All other trademarks acknowledged.

Due to our policy of continuous improvement, Elcometer Limited reserves the right to change specifications without notice. All gauges come with a 1 year warranty as standard, the Elcometer 224 is extendable within 60 days from date of purchase, free of charge, to 2 years via www.elcometer.com

© Elcometer Limited, 2022. All rights reserved. No part of this document may be reproduced, transmitted, stored (in a retrieval system or otherwise), or translated into any language, in any form, or by any means, without the prior written permission of Elcometer Limited.