

DATA SHEET


TEMPERATURE & HUMIDITY METER VA8010

PRODUCT HIGHLIGHTS




- °C/ °F Selection
- Temperature, Humidity and Dew Point
- MAX/ MIN Value Measurement
- Data Hold
- Backlight
- Low Battery Indication
- Auto Power Off
- Battery 1.5V (AAA) x 3

1. PANEL AND CONSTRUCTURE

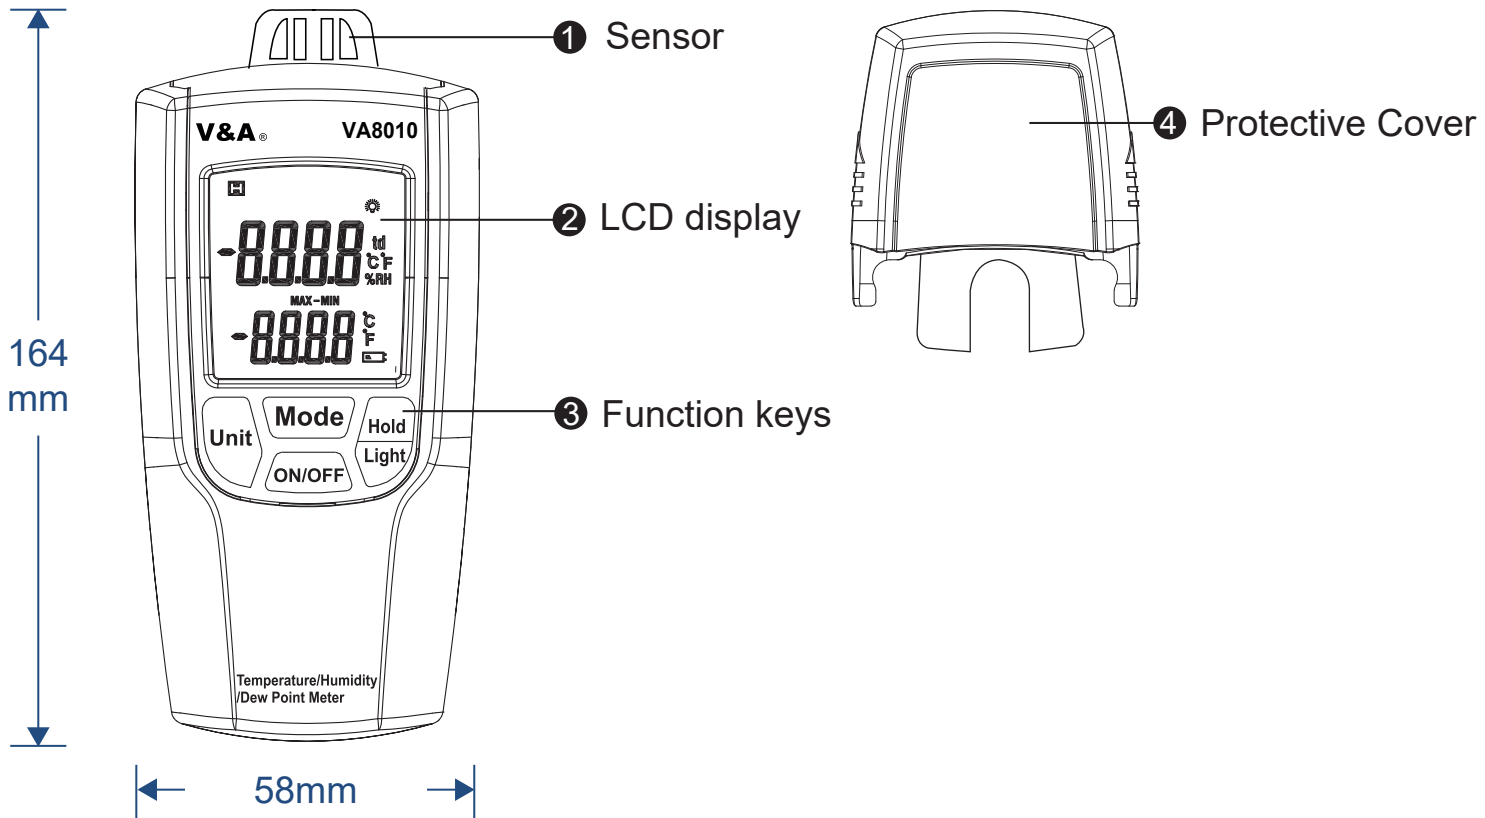

2. LCD AND SYMBOL

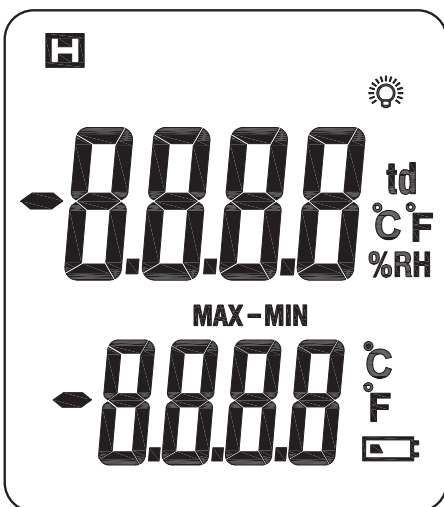

- Dual Display: 7-segment characters LCD
- Number of digits: 4 digits
- Overflow display: "OL" is displayed
- Sample rate: 1 time/ sec for digital data

3. TECHNICAL SPECIFICATIONS

	VA8010
Range	-10°C~50°C, -14°F~122°F, 0~100% RH
Accuracy	±1.0°C, ±1.8°F, ±3%RH
Resolution	0.1°C, 0.1°F, 0.1%RH
Display	4 digits LCD display
Auto Power Off	About 20 minutes
Parameters	°C, °F, %RH (relative humidity), td (dew point temperature)
Sample Rate	1 time/ sec
Low Battery Indication	•
MAX/ MIN Value	•
Backlight	•
Power	1.5V battery (AAA) x 3
Size	164 x 58 x 29 mm
Weight	~116g (without battery)

4. GENERAL SPECIFICATIONS

Function	Value
Pollution degree	2
Operating altitude	< 2000 m
Operating temperature/ humidity	-10°C~50°C, 14°F~122°F; 10~75% RH
Storage temperature/ humidity	-20°C~60°C, -4°F~140°F; 10~90% RH
Power supply	1.5V (AAA) x 3
Dimension/ weight	164(L) x 58(W) x 29(H) mm/ Approx 116g (without battery)

5. SCOPE OF SUPPLY

Model Number	Scope of Supply	Quantity
VA8010	Temperature & Humidity Meter	1 Piece
	Protective Cover	1 Piece
	Wrist String	1 Piece
	User Manual	1 Piece
	Battery 1.5V (AAA)	3 Pieces
	Protective Carry Case	1 Piece
	Box	1 Piece

6. APPLICATIONS



For more information about V&A products
Please visit our website:

WWW.VAINSTRUMENTS.COM

Join US at Facebook and LinkedIn!



Shanghai VA Instrument Co., Ltd.

Factory

Add: Area A/ D, 4th floor, Building 22,
258 Yinlong Road, Waigang Town,
Jiading District, Shanghai 201814, China

Tel: +86-21-69521064

Email: sales@vainstruments.com

R&D Center

Add: Room 901-8, Building 1, Rongchuang Xihuan
Center, Lane 77, Tingxueyuan Road, Nanxiang
Town, Jiading District, Shanghai 201802, China

Tel: +86-021-31211820

Email: tech@vainstruments.com